

PUMPING SYSTEM COMPARISON

	Magnetic Drive Pumps (115V 60 Hz)							Pneumatic Pumps (Explosion-Proof)					
	3/4" Pumps		1" Pumps ¹			1.5" Pumps ¹		1" Pumps		1.5" Pumps		2" Pumps	3" Pumps
	RTK350	PM115	10MDO	10MDC	10CIP	15MDO	15MDC	10PPO	10PPC	15PPO	15PPC	20PPO	30PPO
Hose Connection	3/4"	3/4"	1.0"	1.0"	1.0"	1.5"	1.5"	1.0"	1.0"	1.5"	1.5"	2"	3"
Job Size (GAL)	<5	<50	<500	<500	<500	<1000	<1000	<500	<500	<1500	<1500	<2000	<3000
Bucket Volume	5 GAL	12 GAL	-	14 GAL	15 GAL	-	30 GAL	-	30 GAL	-	30 GAL	-	-
Included Hoses	2 X 6'	2 X 10'	-	3 X 10'	2 X 10'	-	3 X 10'	-	3 X 10'	-	3 X 10'	-	-
Pump HP	-	1/16 HP	1/2 HP	1/2 HP	1/2 HP	3/4 HP	3/4 HP	-	-	-	-	-	-
Max Flow	5.8 GPM	4.5 GPM	40 GPM	40 GPM	40 GPM	70 GPM	70 GPM	43 GPM	43 GPM	118 GPM	118 GPM	166 GPM	216 GPM
Max Head	8 FT	36 FT	53 FT	53 FT	53 FT	43 FT	43 FT	225 FT	225 FT	225 FT	225 FT	225 FT	225 FT
Shipping Weight	15 LBS	22 LBS	46 LBS	66 LBS	200 LBS	46 LBS	200 LBS	29 LBS	200 LBS	80 LBS	200 LBS	90 LBS	170 LBS
Video	HERE	HERE	-	HERE	HERE	-	HERE	-	HERE	-	-	-	-
Webpage	HERE	HERE	HERE	HERE	HERE	HERE	HERE	HERE	HERE	HERE	HERE	-	-
Volts	0.6A	1A	7A	7A	7A	8A	8A	-	-	-	-	-	-


¹Can be rewired to accommodate 230V.
For further details, refer to pump curves.
For reference only, subject to change.



Camlock adapter



15MDC

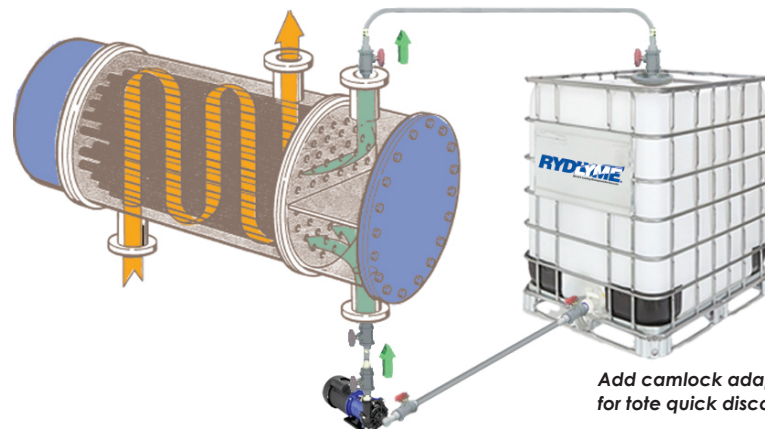

Add camlock adapter for tote quick disconnect